



## ATS-1DR


Analog time switch with daily program




### Characteristics

- The mechanical time switch is a simple and inexpensive alternative to digital time switches for controlling real-time heating, ventilation, cooling, lighting or pump systems:
- Daily program
- Selection of operating modes using a switch on the panel:
  - ⌚ switches automatically according to the set program
  - I closes permanently
- Power reserve after power failure up to 100 hours, after fully charged.

### Connection

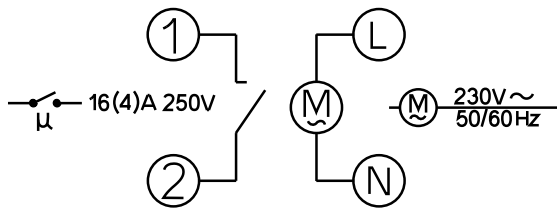


### Description

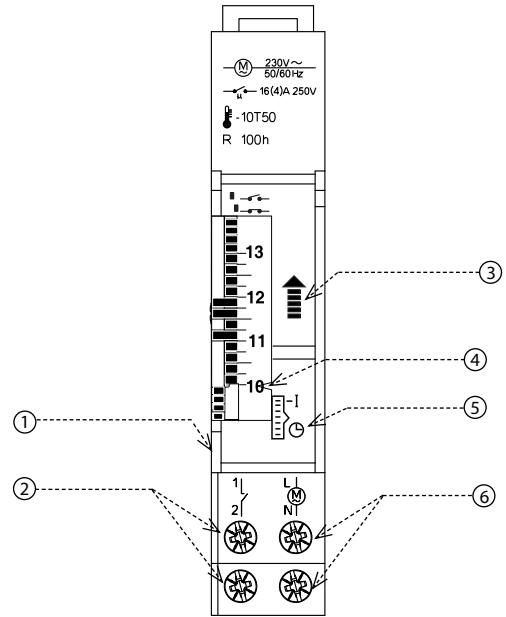

1. Transparent opening cover
2. Output contact (1-2)
3. Rotation of the programming dial
4. Time indicator
5. Operating mode switch
6. Supply voltage terminals (L-N)

### Time setting - daily program

Do not turn against the of rotation of the programming dial

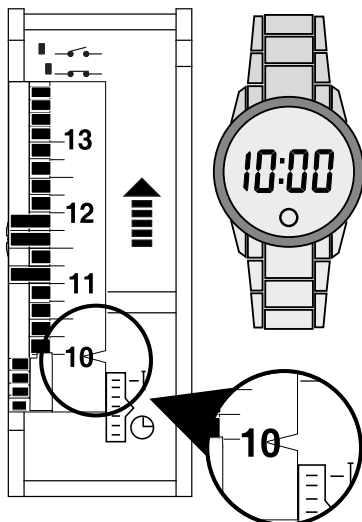


### Settings

Minimum switching interval:  
- daily, 15 minutes (1 segment)

High temperatures can affect the accuracy of the time switches


Push segments left - off  
Push segments to the right - on

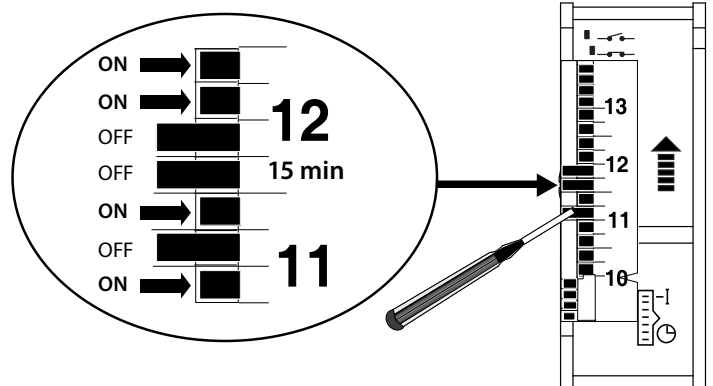


Example:  
10:00 ... 11:00 ON  
11:00 ... 11:15 OFF  
11:15 ... 11:30 ON  
11:30 ... 12:00 OFF  
12:00 ... 13:00 ON


## Operating mode

1 = **I** permanently closes

2 =  switches automatically according to the set program



1



2

## Power reserve

Approximately 100 hours after being connected to the power supply, the power reserve reaches its complete charge of 100 hours.

## Technical parameters

### ATS-1DR

#### Supply

Supply terminals:	L-N
Supply voltage:	AC 230 V (50/60 Hz)
Power consumption (max.):	1.5 VA/1 W
Supply voltage tolerance:	-10 %; +10 %

#### Time circuit

Program:	daily
Number of switching segments:	96
Minimum switching interval:	15 mins
Operating accuracy:	±2s/day at 25 °C
Power reserve:	max. 100 hrs

#### Output

Number of contacts:	1x NO (AgCdO15)
Rated current:	16 A/AC1
Breaking capacity:	4000 VA/AC1
Switching voltage:	250 V AC
Mechanical life:	100.000 ops.
Electrical life (AC1):	30.000 ops.

#### Other information

Operating temperature:	-10 .. +50 °C (14 .. 122 °F)
Storage temperature:	-10 .. +50 °C (14 .. 122 °F)
Dielectric strength:	4 kV (supply – output)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP20
Overvoltage category:	III.
Pollution degree:	2
Cross-wire section – solid/stranded with ferrule (mm <sup>2</sup> ):	max. 1x 4, 2x 2.5/ max. 1x 4 (12 AWG)
Dimensions:	90 × 18 × 66 mm (3,55" × 0,71" × 2,6")
Weight:	70 g (2.5 oz)
Standards:	EN 61812-1, EN 60730

## Warning

Device is constructed for connection in 1-phase network AC 230 V and must be installed according to norms valid in the state of application. Connection according to the details in this direction. Installation, connection, setting and servicing should be installed by qualified electrician staff only, who has learnt these instruction and functions of the device. This device contains protection against overvoltage peaks and disturbances in supply. For correct function of the protection of this device there must be suitable protections of higher degree (A, B, C) installed in front of them. According to standards elimination of disturbances must be ensured. Before installation the main switch must be in position "OFF" and the device should be de-energized. Don't install the device to sources of excessive electro-magnetic interference. By correct installation ensure ideal air circulation so in case of permanent operation and higher ambient temperature the maximal operating temperature of the device is not exceeded. For installation and setting use screw-driver cca 2 mm. The device is fully-electronic - installation should be carried out according to this fact. Non-problematic function depends also on the way of transportation, storing and handling. In case of any signs of destruction, deformation, non-function or missing part, don't install and claim at your seller it is possible to dismount the device after its lifetime, recycle, or store in protective dump.